



6210-C / 6210A-C

SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control
A: Pump Feed Model

Most **Compact & Versatile**
single flavor countertop model
with pump feed option for soft
ice cream & frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Digital control provides access to system settings and displays critical system information

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator

Maintain product consistency and prevent product separation

Ideal for any business with limited counter space to add ice cream, frozen yogurt, gelato or sorbet. Flexible with digital control and display. Great fit for restaurants, bars, kitchens, convenience stores and delis.



Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Refreeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control


Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



6210-C / 6210A-C

SOFT SERVE FREEZER

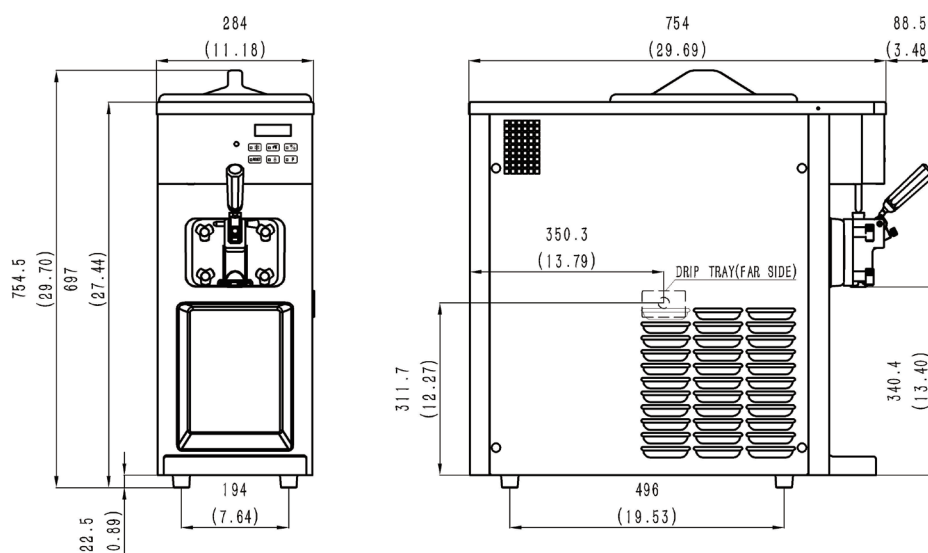

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.2L / 1.3qt
Mix Hoppers	1 x 8L (5L for A)
Output Capacity (80 grams)	150 serves/hr
Clearance Requirements	150mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
--------	-----------------	--------------

Net	90 / 198	100 / 220
-----	----------	-----------

Shipping	102 / 225	112 / 247
----------	-----------	-----------

Volume	0.27 CBM / 9.53 CBF	
--------	---------------------	--

Dimensions	Net (mm/in)	Shipping (mm/in)
------------	-------------	------------------

Width	284 / 11.2	380 / 15.0
-------	------------	------------

Depth	754 / 29.7	800 / 31.5
-------	------------	------------

Height	755 / 29.7	900 / 35.4
--------	------------	------------

Electrical	MFS	MCA	Power(kW)
------------	-----	-----	-----------

110-115/60/1	20	16	1.2
--------------	----	----	-----

220-240/50/1	15	8	1.6
--------------	----	---	-----

208-230/60/1	15	8	1.6
--------------	----	---	-----

FEATURES

Control Systems	Single, Digital
-----------------	-----------------

Refrigerated Hoppers	✓
----------------------	---

Hopper Agitator	✓
-----------------	---

Temperature Display	✓
---------------------	---

Standby Mode	✓
--------------	---

Auto Closing Dispensing Valves	✓
--------------------------------	---

Dispensing Speed Control	✓
--------------------------	---

Low Mix Indicator Light & Alarm	✓
---------------------------------	---

Low Temperature Protection	✓
----------------------------	---

Motor Overload Protection	✓
---------------------------	---

High Pressure Protection	✓
--------------------------	---

Defrost & Quick Refreeze	✓
--------------------------	---

Soft Start (50Hz only)	✓
------------------------	---

Direct Drive Pump (A only)	✓
----------------------------	---

AVAILABLE OPTIONS

Cart (Trolley)	✓
----------------	---

• Above specifications are subject to change without notice

SPACEMAN USA

224 Commerce St. Unit A1,
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113

Email: sales@spacemanusa.com

www.spacemanusa.com